



# LED High Power Flood Light 240W

naturalLED<sup>®</sup> High Power Flood Light deliver the bright crisp light over its lifetime. Our High Power Flood Light comes with two beam types (30° and 60°). Ideal for parks, constructions, and sports field. Innovative modular system can generate over 110lm per watt. Most compact and efficient high power flood light.



### Key Features & Benefits

- ▶ Glass with clear lens
- ▶ Instant Start/ Program Start
- ▶ Excellent color consistency
- ▶ No Flickering
- ▶ Aluminium die cast housing
- ▶ Noise-free design
- ▶ UL Listed
- ▶ Operating Temp: -22°F~122°F
- ▶ 120-277V
- ▶ 50,000 hrs rated average life
- ▶ Extended 9-foot power cable

### Applications

- ▶ Light Towers
- ▶ Construction Lighting
- ▶ Landscape Lighting

### Color Choices



Black





### Qualifications




## ORDERING INFORMATION


2

Item Code	Description	Color Temp	Wattage	Lumen Output	Equivalent Wattage	Voltage (V)	CRI	Beam Angle	Color	Rated Hours		
7445	LED-FXFDL240/50K30D/BK-YK	5000K	240	28,835	575-750W	120-277	80	30°	Black	50,000	•	•
7446	LED-FXFDL240/50K60D/BK-YK	5000K	240	28,977	575-750W	120-277	80	60°	Black	50,000	•	•

► Dimensions

	Wattage	A	B			Weight (lbs)
	240	18.00-in	12.00-in			28.00


► Illuminance Distribution

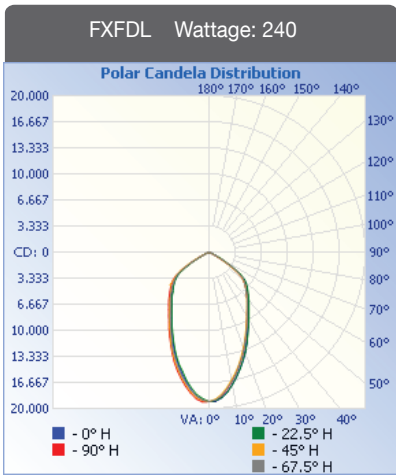

	Center Beam fc	Beam Width
10.0ft	191.0 fc	12.0 ft 12.3 ft
20.0ft	47.8 fc	24.0 ft 24.7 ft
30.0ft	21.2 fc	35.9 ft 37.0 ft
40.0ft	11.9 fc	47.9 ft 49.3 ft
50.0ft	7.6 fc	59.9 ft 61.7 ft

■ Vert. Spread: 61.8°  
■ Horiz. Spread: 63.3°

► Adjustable Arm

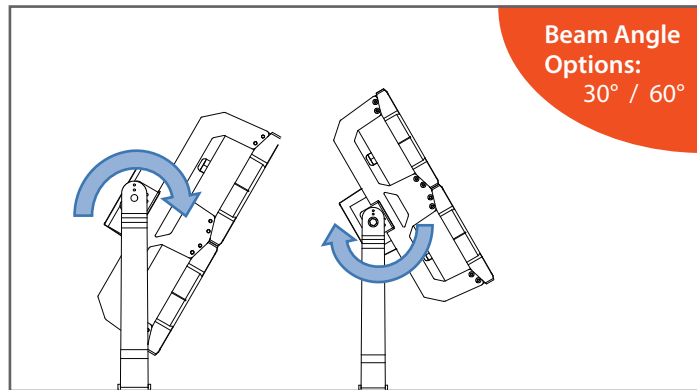

► Master Carton Package

