



Turning Light into Savings ▶▶▶



Bi-Pin T8



Bi-Pin T5



HO (R17d) Base

Single Base



# TUBE IF

## Instant Fit T5/T8

### 10W, 11W, 15W, 18W, 38W, 42W

With naturaLED® Instant-Fit T5 and T8; it's the easiest way to upgrade your fluorescent fixture to an LED system.

Our Instant-Fit T5/T8 fits into an existing fluorescent system. Utilizes the existing electrical T5/T8 fluorescent ballast without re-wiring.

naturaLED Instant-Fit tubes come in variety of lengths and consistent colors. It makes upgrading your existing fluorescent system easy.

#### Key Features & Benefits

- ▶ Frosted glass structure
- ▶ Compatible with Instant Start FL Electronic T8 Ballast
- ▶ Excellent color consistency
- ▶ No Flickering
- ▶ Noise Free design
- ▶ UL/cUL Listed
- ▶ Operating Temperature: -4°F to 113°F
- ▶ 50,000 hrs rated average life
- ▶ FL T5/T8 ballast required

#### Applications

- ▶ Conference Room
- ▶ Meeting Room
- ▶ Factory/ Office
- ▶ School & University
- ▶ Hospital
- ▶ Hotel

#### Color Choices




White

#### Qualifications



**T5 Instant Fit**

Item Code	Description	Color Temp	Wattage	Lumen Output	Equivalent Wattage	Length	Base	Beam Angle	Rated Hours	
5902	LED28T5/FR32/840/IF	4000K	28W	3,200	54	4-ft/ 48"	G5	325°	50,000	•
5903	LED28T5/FR32/850/IF	5000K	28W	3,200	54	4-ft/ 48"	G5	325°	50,000	•

**T8 Instant Fit**

5850	LED10T8/24FR11/835/IF	3500K	10W	1,150	17	2-ft/ 24"	Bi-Pin	325°	50,000	•
5851	LED10T8/24FR11/840/IF	4000K	10W	1,150	17	2-ft/ 24"	Bi-Pin	325°	50,000	•
5852	LED10T8/24FR11/850/IF	5000K	10W	1,150	17	2-ft/ 24"	Bi-Pin	325°	50,000	•
5891	LED11T8/36FR14/840/IF	4000K	11W	1,400	25	3-ft/ 36"	Bi-Pin	325°	50,000	•
5892	LED11T8/36FR14/850/IF	5000K	11W	1,400	25	3-ft/ 36"	Bi-Pin	325°	50,000	•
5914	LED15.5T8/FR18/840/IF	4000K	15.5W	1,800	32	4-ft/ 48"	Bi-Pin	325°	50,000	•
5915	LED15.5T8/FR18/850/IF	5000K	15.5W	1,800	32	4-ft/ 48"	Bi-Pin	325°	50,000	•
5916	LED18T8/FR22/840/IF	4000K	18W	2,200	32	4-ft/ 48"	Bi-Pin	325°	50,000	•
5917	LED18T8/FR22/850/IF	5000K	18W	2,200	32	4-ft/ 48"	Bi-Pin	325°	50,000	•

**8-ft Standard**

5887	LED38T8/96FR44/840/IF	4000K	38W	4,400	59	8-ft/ 96"	Single	325°	50,000	•
5888	LED38T8/96FR44/850/IF	5000K	38W	4,400	59	8-ft/ 96"	Single	325°	50,000	•

**8-ft High Output**

5897	LED42T8/96FR50/R17d/840/IF	4000K	42W	5,000	59	8-ft/ 96"	R17d	325°	50,000	•
5898	LED42T8/96FR50/R17d/850/IF	5000K	42W	5,000	59	8-ft/ 96"	R17d	325°	50,000	•




**FL Ballast Compatibility**

	BAF232IS/MV	BAF232IS/MV/L	BAF332IS/MV	BAF332IS/MV/L	BAF432IS/MV	BAF432IS/MV/L	BAF254PS/MV	BAF454PS/MV	BAF275IS/MV
LED28T5/FR32/840/IF							•	•	
LED28T5/FR32/850/IF							•	•	
LED10T8/24FR11/835/IF	•	•	•	•					
LED10T8/24FR11/840/IF	•	•	•	•					
LED10T8/24FR11/850/IF	•	•	•	•					
LED11T8/36FR14/840/IF	•	•	•	•					
LED11T8/36FR14/850/IF	•	•	•	•					
LED15.5T8/FR18/840/IF	•	•	•	•	•	•			
LED15.5T8/FR18/850/IF	•	•	•	•	•	•			
LED18T8/FR22/840/IF	•	•	•	•	•	•			
LED18T8/FR22/850/IF	•	•	•	•	•	•			
LED38T8/96FR44/840/IF									•
LED38T8/96FR44/850/IF									•
LED42T8/96FR50/R17d/840/IF									
LED42T8/96FR50/R17d/850/IF									

► Dimensions


	T5 / T8	Item	A	B	Weight (lbs)
	T8	2-ft	1.00-in	24.00-in	0.25
		3-ft	1.00-in	36.00-in	0.35
		4-ft	1.00-in	48.00-in	0.50
		8-ft	1.00-in	96.00-in	1.00
T5	4-ft	0.625-in	48.00-in	0.25	

► Illuminance Distribution

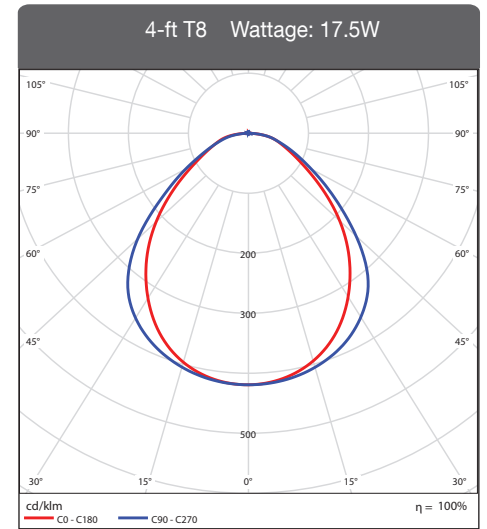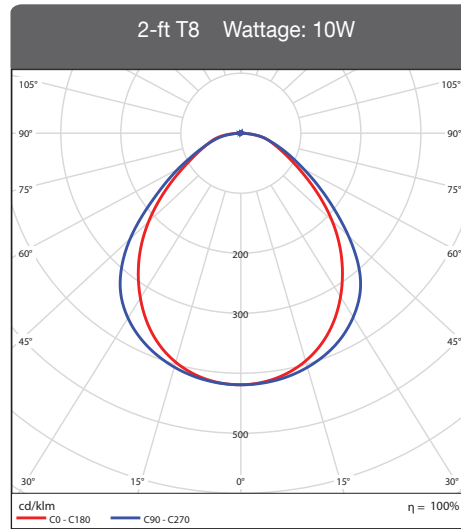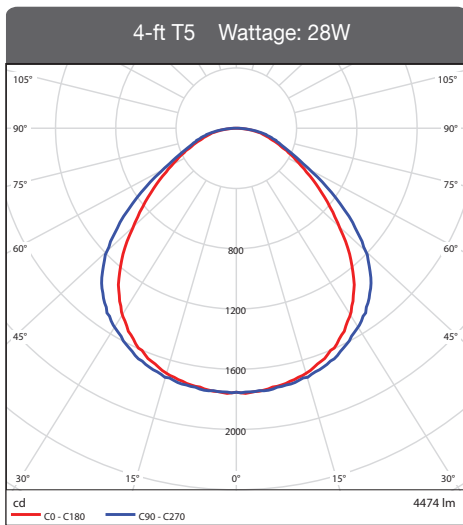

► Master Carton Package

2-ft  
3-ft  
4-ft




Package  
(Master)  

---

25

8-ft



Package  
(Master)  

---

10